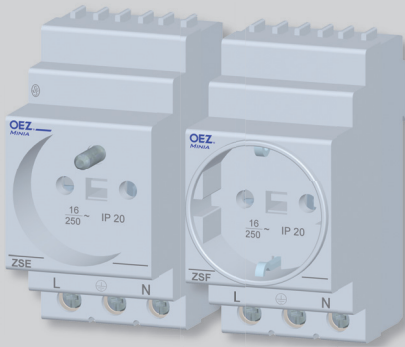



SOCKET OUTLETS

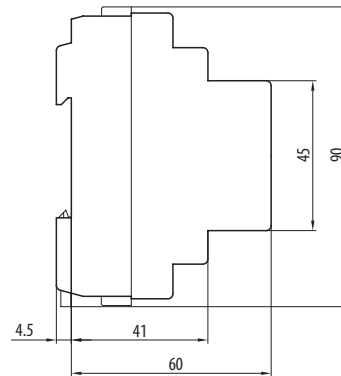
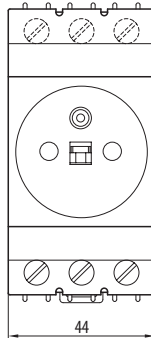
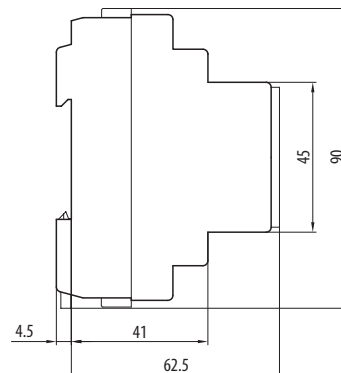
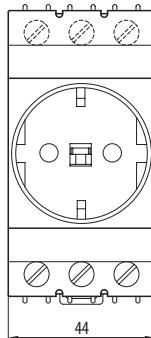
- Modular design with fastening on the „U“ rail wide 35 mm according to EN 60715
- ZSE-.. according to EN 60884-1 – a connector of type E; ensures contact by means of the connector with two round plug contacts and central earthing pin. This type is sometimes referred to as French one
- ZSF-.. according to DIN 49440 – a connector of type F (Schuko), sometimes referred to as German one. It differs in the design of the earthing contact, which consists of two contact metal strips placed on the connector perimeter

Socket outlets

Type	Use	Connection	Product code	Number of modules	Weight [kg]	Package [pcs]
ZSE-03	ČSN	bottom	37290	2.5	0.15	1
ZSE-06	ČSN	bottom and top	37291	2.5	0.15	1
ZSF-03	DIN ("SCHUKO")	bottom	37292	2.5	0.15	1
ZSF-06	DIN ("SCHUKO")	bottom and top	37293	2.5	0.15	1

Specification

Type	ZSE-.., ZSF-..
Standards	EN 60884-1, DIN 49440
Approval marks	
Rated operating voltage/current	U_e / I_n 230 V a.c./16 A
Mounting on "U" rail according to EN 60715 - type	TH 35
Ambient temperature	-25 ÷ +55 °C
Degree of protection	IP20
Connection	1 ÷ 16 mm ² , 2x (1 ÷ 4) mm ²
Seismic immunity	3 g / 8 ÷ 55 Hz

Dimensions**ZSE-..****ZSF-..****Diagram**

ZSE-.., ZSF-..

